




MARPOL
LL4F 801-SB
Linear Low Density Polyethylene

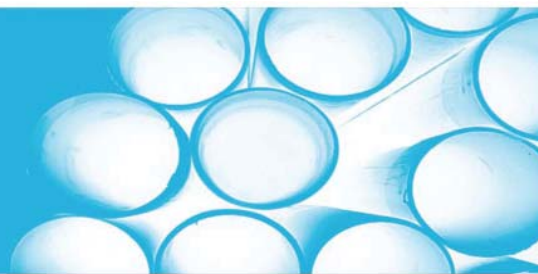

PRODUCT DATA SHEET

PROPERTY	VALUE	ASTM
Melt Index 190°C/ 2.16kg (g/10 min)	1.0	D 1238
Density (g/cm ³)	0.919	D 1505
Dart Drop Impact, F50 (grams)	145	D 1709A
Tensile Strength at Yield (psi)	MD 1800 TD 1500	D 882
Tensile Strength at Break (psi)	MD 4900 TD 3600	D 882
1% Secant Modulus (psi)	MD 29000 TD 31000	D 638

Additives: High Slip and High Antiblock

LL4F 801-SB can - in principle - be used in food contact applications in the USA (FDA) and in Canada (HBP). Migration or use limitations may apply.

This information, to our knowledge, is believed to be correct. The use of this product in its actual conditions are beyond our control and satisfactory results for this product is the customer's sole responsibility.